


CS6

6.66mm pixel pitch, 5000 nits outdoor LED display

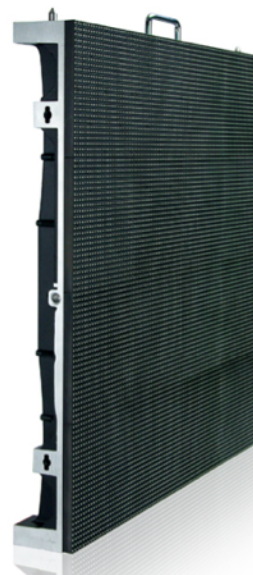

The CS6 outdoor LED display is a member of our CS-series. Its a budget-friendly 6mm screen. It can also be used indoors due to the special shaders. The image processing can be done by 2 sorts of processors.

Lightweight & easy install

Thanks to its die cast aluminum design the screen is very light. Only 12.5 kgs per tile. Because of this, the screen can be installed by 1 technician only.

Suited for outdoor use

The CS6 can both be used indoors and outdoors, as it is equipped with the latest outdoor SMD technology. And thanks to its full P65 rating - it is completely waterproof.

Easy panel removal

The top location pins are removable, easy for changing a whole tile after setting up the whole display.

| Product specifications | CS6 |
|--------------------------------|--------------------------------|
| Pixel pitch | 6.66 mm |
| Brightness | 5000 nits |
| LED type | 3-in-1 SMD |
| Pixel density | 22500/sqm |
| Viewing angle | 140° |
| Contrast ratio | |
| Lifetime | 100000 hrs |
| Power consumption | 650 W/sqm |
| Operation power voltage | 110 - 240 V / 50 - 60 Hz |
| Tile size (WxHxD) in mm | 640 x 640 x 123 |
| Weight | 12.5 kg/tile |
| IP rating | IP65 |
| Processing | 16 bit |
| Refresh rate | 800 Hz |
| Serviceability | back, very fast |
| Operatable digitizer | Folsom ImagePRO II or ChinaPRO |
| Certifications | CE, ETL, RohS |